

THE NUMERICAL INVESTIGATIONS OF DOUBLE-SPAN CONCRETE BEAMS STRENGTHENED WITH FIBER REINFORCED PLASTICS ACROSS THE OBLIQUE SECTION

V.I. Morozov, Yu.V. Pukharenko, A.V. Yushin

Saint Petersburg State University of Architecture and Civil Engineering, Russia

e-mail: morozov@spbgasu.ru

Abstract. We suggest a method for finite-element modelling of beams strengthened with fiber reinforced plastics (carbon fiber-reinforced plastics), which allows analyzing the mechanism of cracks formation and forecasting the failure mode when planning physical experiments. We have represented the comparison of schemes of crack formation obtained as a result of numerical modelling.

1. Introduction

Technology of strengthening of concrete structures with fiber reinforced plastics (FRP) is relatively new for Russia. The first large-scale project, strengthening of the scaffold bridge of the third ring road in Moscow, dates back to 2001. Since then the technology has been successfully applied in hundreds sites in the territory of Russia. Strengthening of oblique sections is implemented by means of gluing the external FRP confinement reinforcement to the zone of a dangerous oblique section of U-shaped stirrups. Russian methods of assessment of stress-strain state of multi-span structures FRP strengthened across the oblique section are currently being developed, while the foreign methods established by the regulations, ensure (according to their authors) significant strength reserve and have been tested only on single-span specimens.

2. Setting of the problem

For modeling of operation of a multi-span reinforced concrete structure strengthened with polymer material across the oblique section, we have conducted a numerical experiment in the programming and computing suite of the *Ansys* final element analysis. 9 double-span reinforced concrete beams with 2460 mm in length and 120x220 (h) mm in section were modeled in the *Ansys Mechanical* programming module (Fig. 2). The beams have the same section spans (300 mm), but different confinement reinforcement rod spacing in the zone of center support (without confinement reinforcement, rod spacing 85 mm, rod spacing 110 mm). Each beam was modeled in three variants – with strengthening at angle 90° to the centerline, with strengthening at angle α (in the direction of the principal tensile stress in unreinforced specimen) and without strengthening. The strengthening was specified in the section span by U-shaped stirrups made from unidirectional carbon of cold (on-site) solidification. The stirrups were set with the width of 50 mm and the pitch of 100 mm. The scheme of specimens strengthening is shown in Fig. 1.

For modeling within the numerical experiment of the stress-strain state, the reinforced concrete beam and composite material of strengthening were divided into volumetric (for concrete modeling), flat (composite material) and axial elements (for modeling of

For integration of the solver into the Ansys we implement the method of conventional conjugate gradients. The convergence control was implemented by the load to the accuracy of 10 %.

3. Research Results

As a result of the numerical experiment we obtained the principal stress isofields and the corresponding strains. In Fig. 3 there are the depictions of oblique cracks in physical specimens and the strain isofields, which correspond to the principal tensile stress in the model fragment, created using *Ansys*.

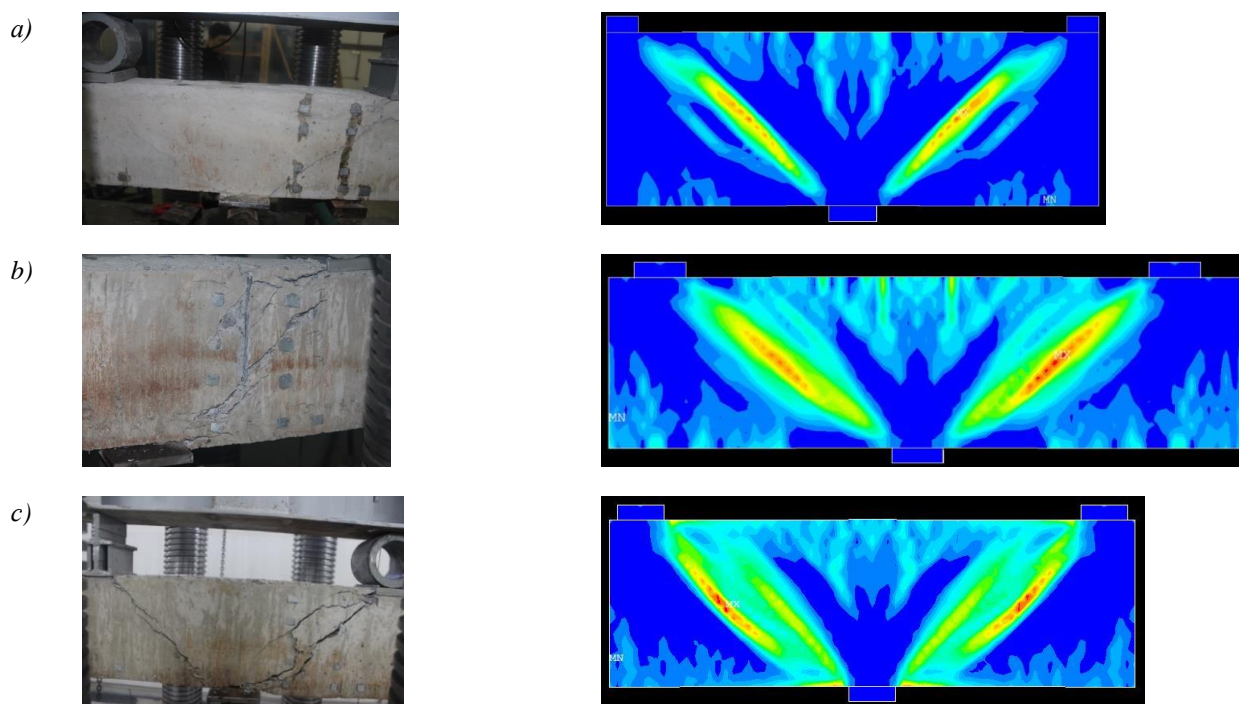


Fig. 3. Shape of the critical oblique crack in the physical specimen and in the finite element model (unreinforced beam): a) the beam without confinement reinforcement, b) the beam with rod spacing equal to 110 mm, c) the beam with rod spacing equal to 85 mm.

As it is seen in Fig. 3, intensification of the confinement reinforcement increases the number of oblique cracks and the width of their opening decreases, which is generally agreed. Comparison of the strain isofields in the *Ansys* model fragment with depictions of the physical specimens shows that shape and number of oblique cracks satisfactorily coincide.

In the reinforced specimens the oblique crack first opens between the elements of reinforcement, which is confirmed by both the physical experiments and the finite elements models. The crack trajectory and angle are satisfactorily proven by conducting the physical experiments. Alongside with the maximum strains in the zone of the oblique crack formation, the peaks have also been discovered at the upper side of beam in the zone of maximum normal tensile stresses (Fig. 4). During the physical experiments, the destruction of the beams was accompanied by the indent of the concrete cones at the upper side of the beam.

4. Conclusion

The conducted experiments showed high efficiency of the *Ansys* programming and computing suite for analyzing the stress-strain state of structures considering nonlinear character of the materials strain. The results of the testing of the unreinforced beams and the material specimens have contributed to elaboration of the finite elements models and forecasting

expensive testing procedures of the reinforced specimens. The preliminary modeling of the reinforced specimens allowed avoiding some mistakes during the physical testing.

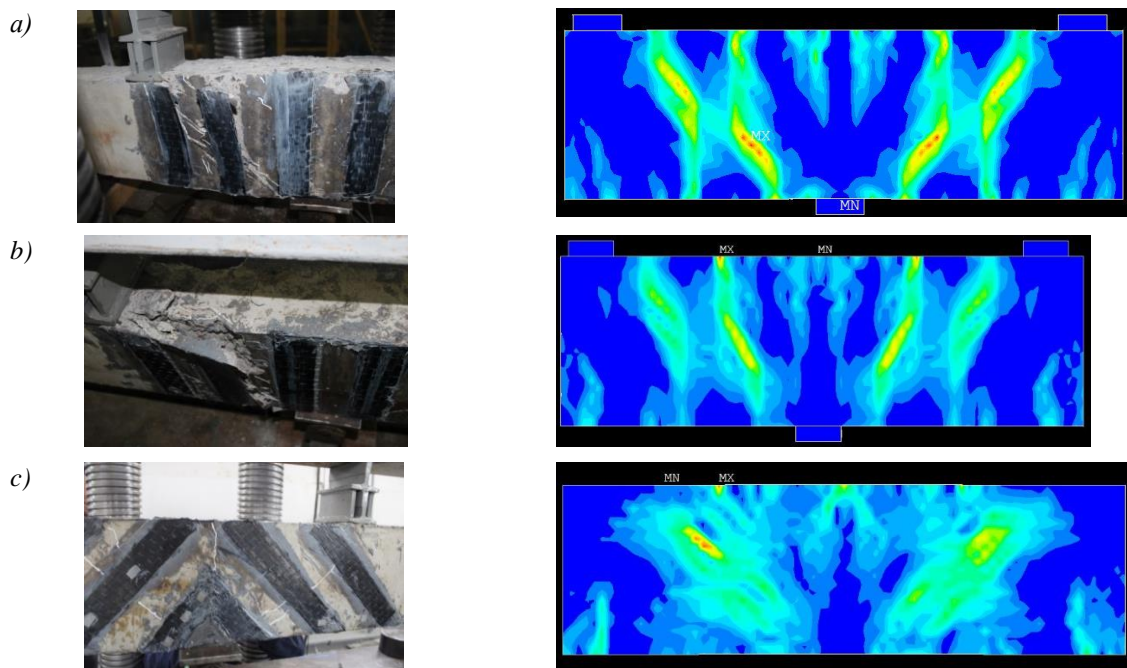


Fig. 4. Shape of the critical oblique crack in the physical specimen and in the finite element model (reinforced beam): a) the beam without confinement reinforcement strengthened by the carbon fiber-reinforced plastic stirrups with 50 mm in width, rod spacing equal to 110 mm at angle 90° , b) the beam with the confinement reinforcement rod spacing equal to 110 mm and carbon fiber-reinforced plastic stirrups reinforcement with 50 mm in width and rod spacing equal to 100 mm at angle 90° , c) the beam with the confinement reinforcement rod spacing equal to 110 mm and carbon fiber-reinforced plastic stirrups reinforcement with 50 mm in width and rod spacing equal to 100 mm at angle α .

References

- [1] K.J. Willam, E.D. Warnke, In: *Proceedings, International Association for Bridge and Structural Engineering. Vol. 19.* (ISMES, Bergamo, Italy, 1975), p. 174.
- [2] G.A. Geniev, V.N. Kissyuk, G.A. Tyupin, *Theory of plasticity of concrete and reinforced concrete* (Stroyizdat, Moscow, 1974).
- [3] SP 63.13330.2012 “Concrete and reinforced concrete structures. Design requirements” (updated version of SNiP 52-101–2003). Moscow, State Unitary Enterprise “Concrete and Reinforced Concrete Research Institute”, Federal State Unitary Enterprise “Design Product Center”, 2012.
- [4] GOST 10180-2012 “Concretes. Methods for strength determination using reference specimens.”
- [5] GOST 25.601-80 “Design calculation and strength testings. Methods of mechanical testing of polymeric composite materials. Test for tensile properties on plane specimens at normal, elevated and low temperatures.”
- [6] A.S. Silantiev, *Use of finite-element method for calculation of bending elements oblique section strength through the example of Abacus and Ansys FE-complexes* (Moscow, 2012).